

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 November 2004 (04.11.2004)

PCT

(10) International Publication Number
WO 2004/094307 A1

(51) International Patent Classification⁷: **C01B 31/00**,
31/12, 31/02, 31/08

(21) International Application Number:
PCT/EP2003/004202

(22) International Filing Date: 23 April 2003 (23.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **FOC
FRANKENBURG OIL COMPANY EST** [LI/LI];
P.O.Box 1515, FL-9490 Vaduz (LI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEIS, Jaan**
[EE/EE]; 82 Pikk Str., Apt 4, 50606 Tartu (EE).
ARULEPP, Mati [EE/EE]; 71 Riia Str., 51010 Tartu
(EE). **PERKSON, Anti** [EE/EE]; 6 Kase Str., 61601 Nõo,
Tartu Maakond (EE).

(74) Agent: **ALBIHNS STOCKHOLM AB**; P.O.Box 5581,
Linnégatan 2, S-114 85 Stockholm (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI utility model (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD TO MODIFY PORE CHARACTERISTICS OF POROUS CARBON AND POROUS CARBON MATERIALS PRODUCED BY THE METHOD

(57) Abstract: A method to selectively increase in high-density porous carbon materials the pore size of such pores that are too small to be accessible for certain molecules. The method applies to porous carbon materials with a density of at least 0.6 g/cm³, with a microporosity of at least 0.45 cm³/g as measured by benzene absorption and with pore size distribution where at least 20 % of the micropores are of size below 10Å. Specific surface of the precursor carbon material is typically >800 m²/g. The method further employs the use of such liquid oxidants for which the precursor material will function as a molecular sieve, water being a preferred such oxidant.



WO 2004/094307 A1

METHOD TO MODIFY PORE CHARACTERISTICS OF POROUS CARBON AND POROUS CARBON MATERIALS PRODUCED BY THE METHOD.

5 FIELD OF INVENTION

The present invention relates to microporous carbon and methods for preparing same. In particular, this invention relates to the preparation of carbonaceous electrode material for electric double layer capacitors having a large capacitance per volume, a low resistivity and moderately high bulk density. The carbonaceous material is preferably produced by thermo-chemical carbonizing and subsequently chemical treating of a carbon precursor of mineral carbide origin.

15 BACKGROUND OF THE INVENTION

During extensive development of electric double layer capacitors (EDLC), also called ultra-capacitors or supercapacitors, and its components it has been found that the key to a good supercapacitor is a pair of polarizable electrodes, more precisely a carbonaceous electrode material possessing high sorption behavior of electrolyte ions. A general question is how to increase the electrochemically active surface while maintaining the high bulk density of carbonaceous material.

The widespread, so-called activated, carbon materials for EDLC are made by carbonizing organic substrates: resins, tars etc., and subsequently oxidizing the formed carbonaceous material. The yield and structural properties such as porosity and density of electrochemically active carbon materials significantly depend on the nature and properties of carbonaceous raw material. Furthermore, it is recognized that the electric double layer capacity depends strongly on the adsorption interaction of the ions in the

pores, and hence the relationship between the pore size and the effective ion size determines the specific EDL capacitance of the carbonaceous electrodes [Salitra et al. J. Electrochem. Soc. 147 (2000), 2486]. U.S. patents No. 6,043,183 and 6,060,424 describe the manufacturing of high power density and high energy density carbons, respectively, for use in double layer energy storage devices. In prior art the high power density of carbon is related to maximizing the fraction of mesopores ranging between 2.0 to 50.0 nm, whereas the high energy density is related to maximizing the fraction of micropores with a pore size less than 2.0 nm. Another U.S. patent No. 5,965,483 describes a process for increasing the fraction of micropores in the range of 0.8 to 2.0 nm in already activated carbon by blending the activated carbon with potassium hydroxide solution subsequently heated at high temperature.

The recommended classification of pores according to IUPAC is that pores, which diameters range between 2 and 50 nm, should be considered as mesopores, and pores with a diameter of below 2.0 nm as micropores.

When the carbon material is characterized by uniform microporous structure and narrow pore size distribution, the respective polarizable electrode most frequently is able to adsorb different amount of positively and negatively charged ions from electrolyte solution. In most commercial organic electrolytes the cations (ammonium, phosphonium, imidazolium etc.) are of a bigger size than the anions (BF_4 , PF_6 etc), therefore the negatively charged electrodes are usually limiting the performance of electrical double-layer capacitors. The application of active carbon with different pore size for negatively and positively charged electrodes in EDLC is considered in US patent application No. 2002/0097549.

It is thus an object of this invention to provide a method for improving the carbon micropore size distribution to increase the specific ion capacity of

microporous carbon, and hence to increase the energy density of EDLC comprising one or both electrodes from this carbon.

The post-treatment (called activation, oxidation, pore-modification, etc.) of carbonaceous material to create and/or enhance the porosity in carbonaceous substrate is conventionally executed by heating the carbonaceous material impregnated with liquid chemical activation agents such as alkali metal hydroxides, carbonates, derivatives of sulfuric and phosphoric acids, and combinations thereof. Drawback of these methods is the difficulty to wash out from carbon the reaction by-products. More convenient is to tailor carbon pore sizes by oxidation with gaseous oxidizing agents. Traditional oxidizing medium comprises water vapor, carbon dioxide or the mixture of those with a carrier gas such as nitrogen, argon or helium. The oxidation creates pores and increases surface area of the carbonaceous material. There exists an optimum reaction/activation that provides a maximum electrochemical performance for the carbon in the electrolyte solution. A drawback of such activated carbon materials, however, is a substantial loss of substrate, which usually exceeds 30-50 wt. %. An undesirably big amount of lost carbon material is caused by the restricted diffusion of molecules of the oxidizing agent into the inner parts of the carbon particles. At the oxidizing reaction temperature the gaseous oxidants more likely interact with the carbon atoms at surface layers of carbon particles, without penetrating to the core of the particles.

It is a further object of this invention to provide a more productive method for improving the pore size distribution of microporous carbon by specifically oxidizing the carbon in micropores of less than 1.0 nm in size, while minimizing the loss of mass.

It is yet another object of this invention to provide an improved carbon with a narrow pore size distribution.

SUMMARY OF THE INVENTION

The above objectives of the invention are achieved by a method of enlarging micropores having a size less than a predetermined size in a microporous carbon material comprising the steps of;

5 selecting a liquid reagent acting as an oxidant at elevated temperature for which the molecules thereof are absorbed in the micropores to be enlarged; impregnating the carbon material with said liquid reagent; and

 thereafter heating the carbon material to a temperature exceeding the oxidizing temperature for said reagent.

10 In a preferred embodiment the porous carbon material used has a bulk density of at least 0.6 g/cm^3 , a microporosity of at least $0.45 \text{ cm}^3/\text{g}$ as measured by benzene absorption and with a pore size distribution in which at least 20%, preferably at least 30%, more preferably at least 40% of the micropores are of
15 a size less than 1 nm, and a specific surface larger than $800 \text{ m}^2/\text{g}$, preferably larger than $1000 \text{ m}^2/\text{g}$; the reagent being water. The microporous carbon material is preferably a carbon powder material having micropores produced by halogenation of a metal or metalloid carbide. Advantageously, the
20 impregnating of the porous carbon material is made by saturating the material at the boiling temperature of the liquid phase of the reagent and heating the impregnated carbon material at $800\text{-}1200^\circ\text{C}$, preferably at 900°C , in inert gas atmosphere.

25 The invention also relates to a microporous carbon material having a bulk density of at least 0.6 g/cm^3 , a specific surface area of $1000\text{-}2200 \text{ m}^2/\text{g}$ and a relative specific surface area by pore size showing a maximum peak within the pore size range $0.75\text{-}2.1 \text{ nm}$ according to the Density Functional Theory, at least 85% of the total surface area resulting from pores with a size less than

two times of the peak pore size and less than 10% of the total surface area resulting from pores with a size less than 0.65 nm.

5 In a preferred embodiment, less than 1% of the total surface area results from pores with a size less than 0.6 nm.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a plot of the characteristic XRD spectrum of inventive carbon powders.

10 FIG. 2 is a graph showing an effect of different oxidative treatments on the pore size distribution of the high-surface area microporous carbon (example 1) according to the Density Functional Theory.

15 FIG. 3 is a graph showing the pore size distribution of the high-surface area microporous carbon materials of TiC origin according to the Density Functional Theory.

FIG. 4 is a graph showing a dependence of micro-porosity and specific gravimetric and volumetric EIS capacitance of microporous carbon electrodes of TiC origin in 1M TEMA / acetonitrile electrolyte.

20 FIG. 5 is a Ragone Plot of "1000F" unpacked supercapacitors showing the advantage of inventive carbon materials (cation-active electrode from the carbon of example 2).

DESCRIPTION OF THE PREFERRED EMBODIMENTS


25 The novelty of method is that microporous carbon is used as molecular sieve for the liquid oxidizing agent, which therefore interacts with a carbon in micropores rather than in meso- and macropores. The liquid oxidant gives at elevated temperatures gaseous reaction products that are removed from the carbon by a flow of inert gas.

Oxidizing heat-treatment of the microporous carbon pre-impregnated with oxidizing agent produces carbon material with improved pore characteristics, which makes these carbon materials more suitable for use in EDLCs than previously known activated carbon materials.

5 These improved characteristics include:

- 1) an increase of the specific capacitance of the carbon
- 2) an increase of the deliverable energy density of the carbon
- 3) a decrease of the electrical resistance of the carbon

10 The present invention provides a method for making a highly microporous carbon with dominating pore size of approximately 1 nm. More precisely a carbon with a maximum pore size peak in the small micropore interval end 0.6-0.9 nm for silicon and titanium carbide, a carbon with a peak pore size in the large micropore interval 1.9 – 2.2 nm with carbides like Mo₂C or B₄C and
15 a number of tailored carbons within the wider interval 0.75 – 2.1 by using non-stoichiometric metal carbides like TiC_{1-x} where 0.5 < x < 1.0 for example. A corresponding chemical reaction is expressed by the general equation:



where subscripts are stoichiometrical constants, X₂ corresponds to a halogen, preferably chlorine, and M denotes the metal or metalloid such as Ti, Si, B or Al. The reaction temperature to yield microporous amorphous carbon depends on the precursor carbide and ranges between 400 and 1100°C. Typical X-ray diffraction spectrum of microporous carbon from above-listed carbides is presented in Fig. 1. The absence of a strong graphite 002 diffraction peak
20 around 2Theta 44 degrees confirms that there is no significant amount of long-range structures in the carbon.
25 The dominating size of micropores in carbon is particularly determined by the precursor carbide i.e. the position and the distance from each other of carbon atoms in the carbide crystal lattice. Conductivity of carbon particularly

depends on the size and shape of the graphene sheets in carbon particles. The ratio of graphitic and disordered amorphous carbon can particularly be controlled by the halogenation conditions: temperature and catalytic ingredients. More precisely, the micrographitic domains in amorphous carbon are created at slightly elevated reaction temperature compared to that needed to form amorphous carbon or by using catalysts, e.g. metals of the iron subgroup in reaction medium. Typical amorphous microporous carbon formed by chlorinating of relevant metal or metalloid carbides have the pore size maximum peak in the interval 0.75-2.1 nm. The pore size distribution tail to larger pore sizes, as meso pores (larger than 2 nm) is surprisingly low. At least 85% of the pores, based on the total surface area, have been observed to have a size less than two times the pore size maximum peak of the specifically reacted metal or metalloid carbide, see for example figure 2. The pore distribution tail for pores that are much smaller than the peak size contributes to a considerable extent to the measured specific surface area, but these pores deny access for the commercially used electrolyte ions used in batteries or capacitors. Thus, these small pores do not contribute to the battery or capacitor performance. To optimize the performance of such carbon electrodes the tail representing the smallest sized pores must be reduced. According to the invention an increase of the fraction of electrochemically active micropores in carbon is achieved by filling the micropores with the oxidizing reagent in liquid phase at a temperature below that needed to start the oxidation reaction. When water was used as oxidizing agent the liquid phase treatment of carbon powder was executed in boiling water until the carbon particles precipitated. Other gaseous products giving oxidizing liquids such as e.g. nitric acid, ammonium nitrate and hydrogen peroxide may be used. Other saturation methods such as vacuum or pressurized filling may be used. After that a wet carbon slurry consisting of approximately 100-200% (wt.) of oxidizing liquid per dry carbon is heated to oxidizing temperature in inert gas atmosphere to

obtain a carbon material with moderately widened micropores throughout the whole particle. Different oxidation procedures were systematically studied and the following conclusions are drawn.

Oxidation of microporous precursor carbon by water considerably
5 reduces the fraction of smallest micropores with a diameter less than 0.7 nm. This effect is observed for the carbon pre-saturated in liquid oxidant with subsequent oxidation in argon flow as well as for the carbon subjected to the prolonged oxidation in the flow of gaseous oxidant (cf. Figs. 2 and 3). Significant difference in pore-size distribution of those materials is observed
10 at pore sizes above 0.8 nm. When the heating of water saturated carbon material is executed at oxidizing temperature in argon atmosphere, the fraction of micropores of approximately 1.0 nm is more than 10-20% higher than in the carbon oxidized in the flow of water vapor. The flow method needs more time to influence internal micropores. The price to do this is that the surface of
15 particles became overoxidized with unnecessary loss of mass as a result.

Comparison of pore volume data and specific surface areas, presented in Table 1, reveals that in the case of carbon materials derived from TiC (samples 1a-c and 3a-c) the inventive oxidizing treatment, more precisely the heating of the water-impregnated carbon at 900°C, results in marginal increase of
20 respective figures compared to the precursor carbon. The comparative oxidation in flow of water vapors oppositely leads to substantial increase in pore volume. These results are well supported by the relative amounts of oxidized carbon material lost as indicated in Table 1. The advantage of the inventive oxidation method is well seen in specific physical and
25 electrochemical data presented in Table 2. From several test series applying different precursor carbon it is obvious that the inventive oxidizing treatment using pre-impregnation of a liquid reagent influences the porosity and consequently the bulk density of the respective electrodes noticeably less than the comparative treatment in a flow of a gaseous oxidant. Furthermore, while

the impregnation method does not change the porosity of precursor carbon, it is obvious that the improved specific capacitance at negative potential values (EIS capacitance at -1.4V is presented in Table 2) is achieved mainly by improving the pore sizes to give better adsorption of cations from the electrolyte solution.

In a carbon having pores being modified in accordance with the method described above less than 10% of the total specific surface area by pore size according to the Density Functional Theory results from pores with a size less than 0.65 nm and less than 1% results from pores with a size less than 0.6 nm.

The surprising effect of liquid-phase impregnation prior to oxidation can be explained by the microporous carbon, comprising pores of less than 0.7-0.8 nm, behaving as "molecular sieve" for the water molecules. Classical water-sieves used to eliminate moisture from organic solvents and to dry gases usually comprise pores of 0.3-1.0 nm. Although molecular sieves consisting of pores of 0.3 to 0.5 nm absorb water molecules more specifically, the sieves comprising pores of 0.5 to 1.0 nm are sometimes preferred in practical applications because these sieves are more easily regenerated, i.e. dried at elevated temperatures. Water that is adsorbed during impregnation in larger micropores is more likely to evaporate during heat-up of the wet carbon slurry, and hence predominantly such molecules that are absorbed in small micropores participate in the oxidation reaction. The molecular sieve effect of small micropores was particularly confirmed by comparative tests: 1) impregnation of carbon in boiling water for 1h prior to heat-treatment at 900°C in Argon flow; 2) repeated impregnation and heat treatment using the same routine; and 3) prolonged impregnation (5-6h) of carbon prior to heat-treatment. When the effect on the pore size distribution and electrochemical properties of carbon were observed after carbon treatment using the first mentioned step 1, there was no further changes after treatment according steps

2 and 3. However, there is opportunity to use the carbon, which is oxidized by absorbed water molecules as described above, to gain a further sieving effect for another, liquid reagent that has somewhat bigger size polar molecules, which can be absorbed by the enlarged micropores in such a carbon. It is thus possible to gain a further tailoring of micropore size by impregnating the carbon having micropores enlarged by the method described above with the use of water, with a second liquid reagent that has a boiling point below decomposition temperature and decomposes to volatile products comprising at least one component that oxidizes carbon..

TABLE 1

Specific surface (S_{BET}) according to BET, pore volume according to benzene (W_s) and nitrogen (V_{tot}) sorption of different carbon materials (1-5). In sample numbers, "a" defines the precursor carbon, "b" - treatment by the inventive method and "c" - the comparative gas-flow oxidation. The last column refers to the percentage of carbon lost during oxidative treatment.

Carbon No.	W_s [cm ³ g ⁻¹]	S_{BET} [m ² g ⁻¹]	V_{tot} [cm ³ g ⁻¹]	Lost Carbon [%]
1a	0.67	1402	0.72	-
1b	0.68	1555	0.78	4
1c	0.97	1987	1.09	30
2a	0.45	1083	0.54	-
2b	0.56	1320	0.76	17
2c	0.91	1791	0.96	47
3a	0.59	1390	0.71	-
3b	0.67	1503	0.71	15
3c	0.91	1929	0.96	39
4a	0.47	1070	0.49	-
4b	0.56	1200	0.63	54
4c	0.64	1397	0.75	65
5a	0.42	938	0.46	-
5b	0.53	1188	0.59	27
6a	0.44	1031	0.50	-
6b	0.49	1115	0.64	12

TABLE 2

Bulk density, thickness and specific capacitance of electrodes from different precursors, inventive and comparative carbon materials measured in 1M TEMA/AN electrolyte. In sample numbers, "a" defines the precursor carbon, "b" - the treatment by the inventive method and "c" - the comparative gas-flow oxidation.

Carbon No.	d [g/cm ³]	EIS [F/g]		EIS [F/cm ³]		Porosity* [%]
		-1.4V	+1.4V	-1.4V	+1.4V	
1a	0.66	86	129	57	85	44
1b	0.65	102	132	66	87	44
1c	0.53	116	128	61	68	51
2a	0.77	59	117	45	90	35
2b	0.63	92	134	58	84	35
2c	0.53	105	130	55	69	48
3a	0.73	65	116	47	84	43
3b	0.67	101	138	67	94	45
3c	0.56	107	123	59	69	51
4a	0.74	53	123	39	91	35
4b	0.62	90	128	56	80	35
4c	0.63	102	136	64	85	40
5a	0.85	50	101	42	86	36
5b	0.75	79	107	59	81	40
6a	0.83	43	89	36	74	37
6b	0.68	63	101	43	69	33

* Porosity (cm³/cm³) = $W_s \cdot d \cdot 100\%$, where W_s is pore volume according to Benzene sorption and d is bulk density of the electrode.

One advantage of the method provided by this invention is that presaturation of microporous carbon material with the oxidizing agent prior to starting the oxidizing reaction yields carbon with very narrow pore size distribution tailored to possess superior sorption behavior of the electrolyte ions. Another advantage of the method is that no external flow of oxidizing gas or vapor is applied. Therefore is avoided the undesirable bulk oxidation of surface layers of carbon particles and the yield of electrode carbon material is much higher compared to that obtained by the conventional carbon activation processes of oxidizing in gas/vapor atmosphere at high temperature. An important advantage is also that the bulk density of conductive and highly microporous carbon material is only slightly reduced during the oxidation process. The high density of electrodes is in fact a key to the high volumetric electrochemical characteristics of supercapacitors.

Supercapacitors of approximately 1000F were assembled so that the positively charged electrodes of all devices were composed from the precursor carbon **1a** made from TiC. Negatively charged electrodes of SC 348, SC 432 and SC 420 were composed from precursor carbon (**1a**), inventive carbon (**1b**) and comparative carbon (**1c**), respectively. It is seen from Table 3 and from the Ragone plot (Fig. 5) that a capacitor including negatively charged electrodes from inventive carbon has considerable advantage in practical applications. For instance, the "10-second" and "5-second" application parameters shown in Fig. 5 are of practical use in automotive applications.

TABLE 3

5 *Examples of electrochemical performance* of prototype electric double layer capacitors according to the present invention.*

SC #	Electrode pair + / -	Volume [cm ³]	Specific Capacitance [F cm ⁻³]	Specific Resistance [Ω cm ³]	Energy Stored [Wh L ⁻¹]
348	1a / 1a	84.2	11.67	0.040	10.1
432	1a / 1b	97.2	11.93	0.030	10.4
420	1a / 1c	97.2	10.70	0.026	9.3

* Data for unpacked cells

EXAMPLE 1

10 *Typical procedure for preparation of microporous precursor carbon material from fine powder of Titanium Carbide.*

Titanium carbide (H.C. Starck, grade C.A., 300 g) with an average
 15 particle size of 1.3-3 microns was loaded into a quartz rotary kiln reactor and
 let to react with a flow of chlorine gas (99.999% assay) for 4h at 950°C. Flow
 rate of chlorine gas was 1.6 l/min and rotation speed of reactor tube ~2.5 rpm.
 The by-product, TiCl₄, was led away by the stream of the excess chlorine and
 passed through a water-cooled condenser into a collector. After that the reactor
 20 was flushed with Argon (0.5 l/min) at 1000°C for 1h to remove the excess of
 chlorine and residues of gaseous by-products from carbon. During heating and
 cooling, the reactor was flushed with a slow stream (0.5 l/min) of argon.
 Resulting carbon powder (47.6g) was moved into quartz stationary bed reactor
 and treated with hydrogen gas at 800°C for 2.5h to dechlorinate deeply the

carbon material. During heating and cooling, the reactor was flushed with a slow stream of Argon (0.3 l/min). Final yield of the carbon material **1a** was 45.6g (75.9% of theoretical).

5

EXAMPLE 2

Inventive carbon material by modification of micropores of the carbon of Example 1.

10

15

A carbon powder of Example 1 (39g) was boiled for 2h in 250ml water in a round-bottom flask equipped with reflux cooler. After that the carbon was filtered and the paste, containing approximately 2g water per 1g carbon was placed in a quartz reaction vessel and loaded into a horizontal quartz reactor heated by a tube furnace. The argon flow was then passed with a flow rate of 0.6 l/min through the reactor and the furnace was heated up to 900°C using a heat-up gradient of 15 °/min. The heating of a carbon at 900°C was continued in argon flow for 2h. After that the reactor was slowly cooled to room temperature. The yield of thus modified carbon **1b** was 37.5g (96%).

EXAMPLE 3

20

Comparative carbon material by gas-phase oxidation of the carbon of Example 1.

25

A carbon powder of Example 1 (40g) was placed in a quartz reaction vessel and loaded into horizontal quartz reactor heated by a tube furnace. Thereupon the reactor was flushed with argon to remove air and the furnace was heated up to 900°C using a heat-up gradient of 15°/min. The argon flow was then passed with a flow rate of 0.8 l/min through distilled water heated up to 75-80°C and the resultant argon/water vapor mixture with approximate ratio of 10/9 by volume was let to interact with a carbon at 900°C for 2.5h. After

that the reactor was flushed with argon for one more hour at 900°C to complete the activation of a carbon surface and then slowly cooled to room temperature. The yield of thus modified carbon 1c was 28g (70%).

5

EXAMPLE 4

Typical synthesis of microporous precursor carbon material from Silicon Carbide.

10 Silicon carbide (H.C. Starck, lot. 3481, 60.2 g) with an average particle size of 1 micron was loaded into a quartz rotary kiln reactor and let to react with a flow of chlorine gas (99.999% assay) for 3.5h at 1100°C. Flow rate of chlorine gas was 1 l/min and rotation speed of reactor tube ~2.5 rpm. The by-product, SiCl₄, was led away by the stream of the excess chlorine and passed through a water-cooled condenser into a collector. After that the reactor was
15 flushed with Argon (0.5 l/min) at 1100°C for 1h to remove the excess of chlorine and residues of gaseous by-products from carbon. During heating and cooling, the reactor was flushed with a slow stream (0.5 l/min) of Argon. The yield of the carbon material 2a was 18g (99.4% of theoretical).

20

EXAMPLE 5

A carbon powder of Example 4 (6g) was treated as described in Example 2. The yield of thus modified carbon 2b was 5g (83%).

EXAMPLE 6

25

A carbon powder of Example 4 (15g) was treated as described in Example 3. The yield of thus modified carbon 2c was 7.9g (52.7%).

EXAMPLE 7

Typical preparation of microporous precursor carbon material from Titanium Carbide in fluidized bed.

5 Titanium carbide (Pacific Particulate Materials, lot 10310564, 1000 g) with an average particle size of 70 microns was loaded into a fluidized bed reactor and let to react with a flow of chlorine gas (99.999% assay) for 4h at 950°C. Flow rate of chlorine gas was 10 l/min. The by-product, TiCl_4 , was led away by the stream of excess chlorine and passed through a water-cooled
10 condenser into a collector. After that the reactor was flushed with Argon (5 l/min) at 1000°C for 0.5h to remove the excess of chlorine and residues of gaseous by-products from carbon. During heating and cooling, the reactor was flushed with a stream (5 l/min) of argon. Resulting carbon powder (190g) was moved into quartz stationary bed reactor and treated with hydrogen gas at
15 800°C for 2.5h to dechlorinate deeply the carbon material. During heating and cooling, the reactor was flushed with a slow stream of Argon (0.3 l/min). Final yield of the carbon material **3a** was 180g (90% of theoretical). The carbon powder was milled prior electrode manufacturing.

20

EXAMPLE 8

A carbon powder of Example 7 (30.3g) was treated as described in Example 2. The yield of thus modified carbon **3b** was 25.7g (85%).

EXAMPLE 9

25 A carbon powder of Example 7 (5.2g) was milled and treated as described in Example 3, with exception that the oxidation was prolonged by 1h. The yield of thus modified carbon **3c** was 3.2g (61%).

EXAMPLE 10

Preparation of microporous precursor carbon material from Titanium Carbide using catalyst assisted chlorination.

5 Titanium carbide (H.C. Starck, grade C.A., 250g) with an average particle size of 1.3-3 microns was thoroughly mixed with cobalt(II) and nickel(II) chlorides solution in ethanol at room temperature, with the final content of 16 mg of each chloride per gram of carbide. Upon that the ethanol was evaporated. The dry reaction mixture was loaded into a quartz rotary kiln reactor and let to react with a flow of chlorine gas (99.999% assay) for 4.5h at 10 500°C. Flow rate of chlorine gas was 1.6 l/min and rotation speed of reactor tube ~2.5 rpm. The by-products were led away by the stream of excess chlorine and passed through a water-cooled condenser into a collector. After that the reactor was flushed with Argon (0.5 l/min) at 1050°C for 1h to remove 15 the excess of chlorine and residues of gaseous by-products from carbon. During heating and cooling, the reactor was flushed with a slow stream (0.5 l/min) of argon. Resulting carbon powder (49g) was moved into quartz stationary bed reactor and treated with hydrogen gas at 800°C for 3h to dechlorinate deeply the carbon material. During heating and cooling, the 20 reactor was flushed with a slow stream of Argon (0.3 l/min). Final yield of the carbon material **4a** was 46g (91% of theoretical).

EXAMPLE 11

A carbon powder of Example 10 (10.1g) was treated as described in 25 Example 2. The yield of thus modified carbon **4b** was 4.7g (46%).

EXAMPLE 12

A carbon powder of Example 10 (10g) was treated as described in Example 3, with exception that the oxidation was prolonged by 1h. The yield of thus modified carbon **4c** was 3.5g (35%).

5

EXAMPLE 13

Activated carbon cloth (Chemviron FM-1/250) was milled to fine powder (sample No. **5a**) prior to further treatments and electrode manufacturing.

10

EXAMPLE 14

A carbon powder of Example 13 (3.3g) was treated as described in Example 2. The yield of thus modified carbon **5b** was 2.4g (73%).

15

EXAMPLE 15

Activated carbon pellets (Chemviron WS45) were milled to fine powder (sample No. **6a**) prior to further treatments and electrode manufacturing.

EXAMPLE 16

20

The carbon powder of Example 15 (5.8g) was treated as described in Example 2. The yield of thus modified carbon **6b** was 5.1g (88%).

Characterization of Carbon materials according to this invention

25

Low temperature nitrogen sorption experiments were performed using Gemini Sorptometer 2375 (Micromeritics). The specific surface area of carbon materials was calculated according BET theory up to the nitrogen relative pressure (P/P_0) of 0.2. The total volume of pores was calculated from nitrogen adsorption at relative pressure (P/P_0) of 0.95, and the pore size distributions from adsorption characteristics according to the Density Functional theory.

Adsorption dynamics of benzene vapours was studied at room temperature using computer controlled weighing of the carbon samples in benzene vapours at normal pressure and room temperature in time. The volume of pores that adsorbed benzene under the above-described conditions, was calculated according to the equation

$$W_s = (m_2 - m_1) / m_1 \cdot d_{C_6H_6} \text{ [cm}^3\text{g}^{-1}\text{]}$$

where m_1 and m_2 are the initial and final weights of the test-sample, respectively, and $d_{C_6H_6}$ is the density of benzene at room temperature.

10 Method for preparation of electrodes

Carbon powder (10g) was stirred in ethanol and kept at $\sim 0^\circ\text{C}$ for 5 minutes. After that 6% wt. of PTFE (as a 60% suspension in water) was added to the slurry, thoroughly mixed and gently pressed until a wet cake was formed. Thereupon the ethanol was evaporated. The cake was then
15 impregnated with heptane, shaped to a cylinder and extruded by rolling the body in the axial direction of the cylinder. This procedure was repeated until elastic properties appeared. Finally the heptane was removed at $\sim 75^\circ$, the extruded cake rolled stepwise down to the desired thickness, preferably 100-115 microns, dried in vacuum at 170°C and plated from one side with an
20 aluminum layer of 4 ± 1 microns using Plasma Activated Physical Vapor Deposition.

Electrochemical evaluation of Carbon materials

The electrochemical tests were performed in a 3-electrode
25 electrochemical cell, using the Solartron potentiostat 1287 with FRA analyzer. Electrochemical experiments were done in an electrolyte comprising 1.0M Triethylmethylammonium tetrafluoroborate (TEMA) in Acetonitrile (AN). During experiments the electrolyte was degassed with Argon. Experiments using constant voltage (CV), constant current (CC), and impedance (EIS)

technique were carried out. The region of the ideal polarizability was observed between -1.5 to +1.5V (vs. SCE). Discharge capacitance for the negatively and positively charged electrode materials was calculated from the CV and CC plots. The EIS measurements were carried out at AC 5mV and DC potentials: 5 -1.4V and +1.4V. The EIS capacitance was calculated at frequency of 10mHz.

Assembling and preconditioning of capacitors

The electrodes were attached to Al foil of 10 microns thickness (current collector) and interleaved with a separator. An ion-permeable separator paper 10 from Codashi Nippon was used in the present examples. The electrode pairs from positively and negatively charged polarizable electrodes were connected in parallel. The electrode pack thus prepared was placed in a sealed box, kept at 100°C under vacuum for three days to remove all gases absorbed and then impregnated with electrolyte comprising a solution of a mixture of 0.75M 15 triethylmethylammonium tetrafluoroborate and 0.75M tetraethylammonium tetrafluoroborate in acetonitrile. The electric double layer capacitor (EDLC) cells thus fabricated were cycled within the voltage range of 1.2-2.5 V under constant current conditions.

20 Evaluation of Supercapacitors

The constant current (CC) and constant voltage (CV) tests were carried out using the potentiostat Solartron 1287. The nominal voltage of capacitors was estimated from the CV plots. The capacitance of the supercapacitors using discharge from 2.5V to 0V was calculated from CC plots according to the 25 formula: $C = \text{Idt}/dE$. Electrochemical impedance spectroscopy (EIS) was used to determine the series resistance of the capacitor at frequency 10Hz (DC = 2.5V; AC = 5mV).

The power, energy performance and respective Ragone plots were calculated using constant resistance test mode and charge/discharge cycling between 2.5V and 1.25V.

Claims

1. A method of enlarging micropores having a size less than a predetermined size in a microporous carbon material comprising the steps of;
5 selecting a liquid reagent acting as an oxidant at elevated temperature for which the molecules thereof are absorbed in the micropores to be enlarged; impregnating the carbon material with said liquid reagent; and
 thereafter heating the carbon material to a temperature exceeding the oxidizing temperature for said reagent.
10
2. The method according to claim 1, wherein the porous carbon material has a bulk density of at least 0.6 g/cm^3 , a microporosity of at least $0.45 \text{ cm}^3/\text{g}$ as measured by benzene absorption and with a pore size distribution in which at least 20%, preferably at least 30%, more preferably at least 40% of the
15 micropores are of a size less than 1 nm, and a specific surface larger than $800 \text{ m}^2/\text{g}$, preferably larger than $1000 \text{ m}^2/\text{g}$; the reagent being water.
3. The method according to claim 2, wherein the microporous carbon material is a carbon powder material having micropores produced by
20 halogenation of a metal or metalloid carbide.
4. The method according to claim 1, 2 or 3, wherein the impregnating of the porous carbon material is made by saturating the material at the boiling temperature of the liquid phase of the reagent and heating the impregnated
25 carbon material at $800\text{-}1200^\circ\text{C}$, preferably at 900°C , in inert gas atmosphere.
5. A microporous carbon material having a bulk density of at least 0.6 g/cm^3 , a specific surface area of $1000\text{-}2200 \text{ m}^2/\text{g}$ and a relative specific surface

area by pore size showing a maximum peak within the pore size range 0.75-2.1 nm according to the Density Functional Theory, at least 85% of the total surface area resulting from pores with a size less than two times of the average ? peak pore size and less than 10% of the total surface area resulting from pores with a size less than 0.65 nm.


5

6. The microporous carbon material according to Claim 5, wherein less than 1% of the total surface area results from pores with a size less than 0.6 nm.

1/5

FIG. 1


Characteristic XRD spectrum by $\text{CuK}\alpha$ -radiation of inventive carbon powders of carbide origin.

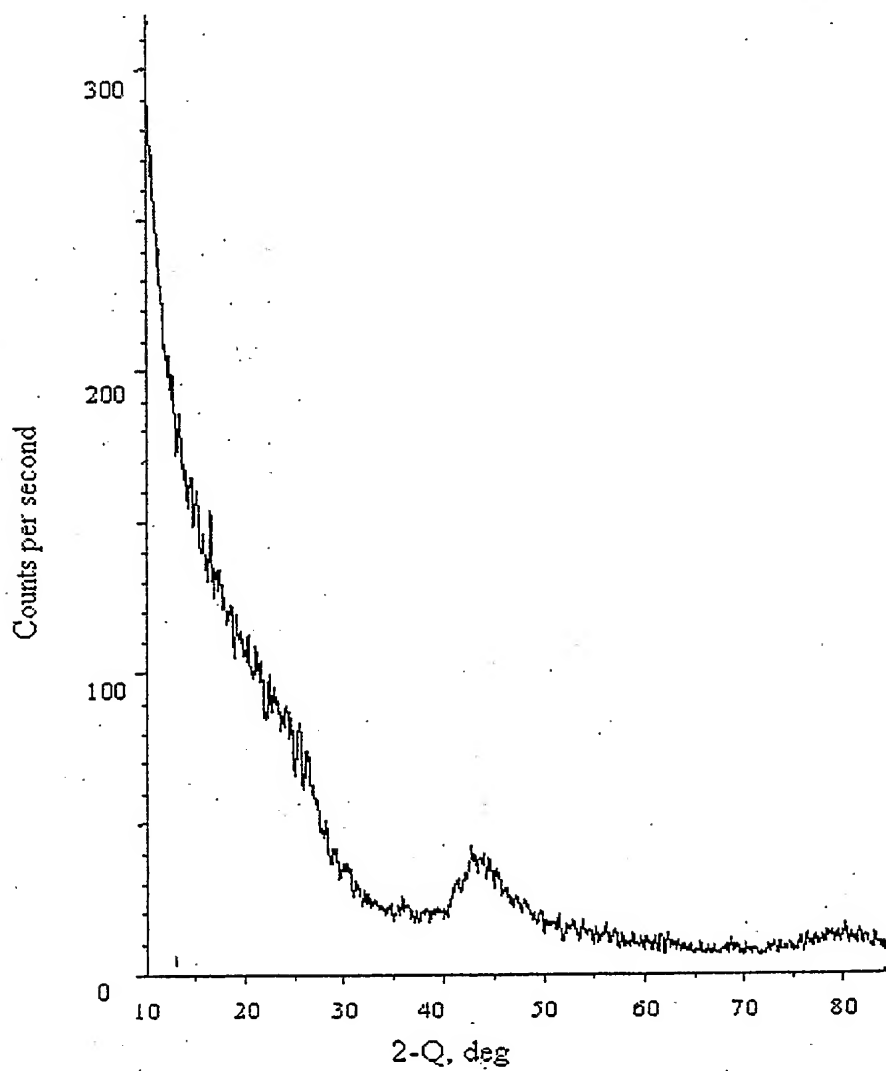

2/5

FIG. 2


An effect of different oxidative treatments on the pore size distribution of the high-surface area microporous carbon (1a) according the Density Functional Theory.

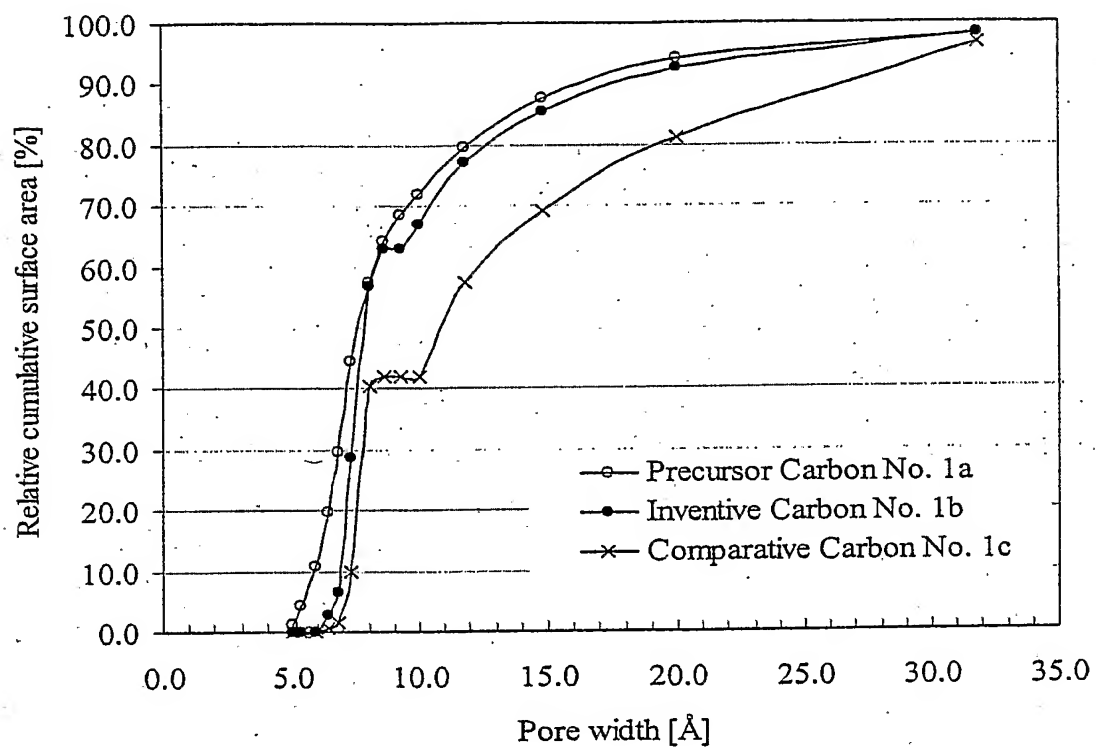

3/5

FIG. 3


Comparison of the pore size distribution of the high-surface area microporous carbon materials of TiC origin according the Density Functional Theory.

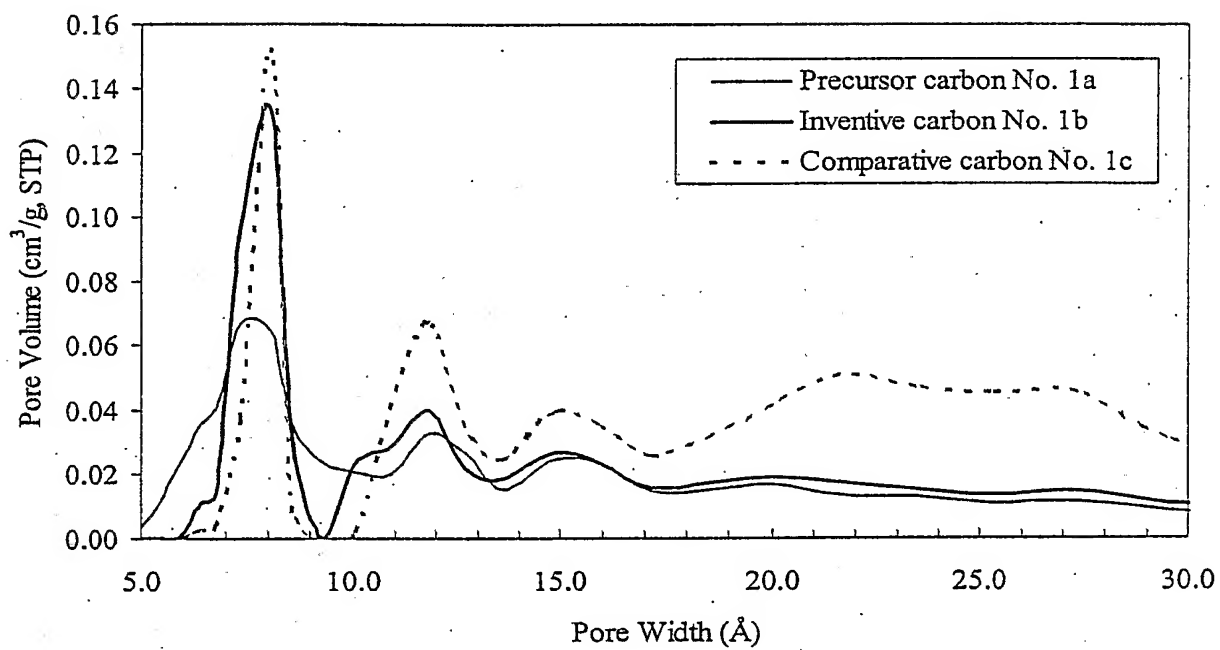

4/5

FIG. 4


Dependence of micro-porosity and specific capacitance according to impedance spectroscopy of microporous carbon electrodes of TiC origin in 1M TEMA / acetonitrile electrolyte. The empty symbols correspond to the precursor and comparative materials, the filled patterns to the inventive materials.

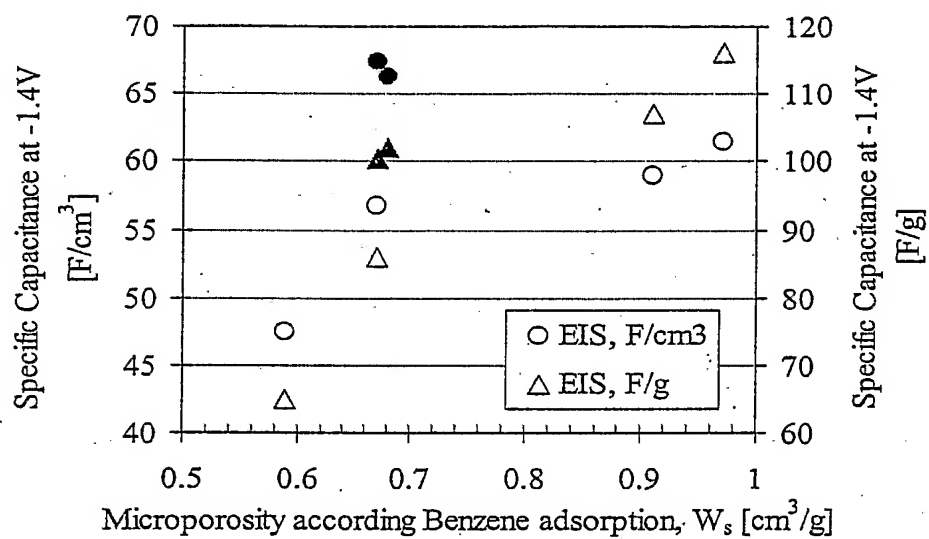

5/5

FIG. 5

Ragone Plot of "1000F" unpacked supercapacitors showing the advantage of inventive carbon materials (cation-active electrode from the carbon 1b).

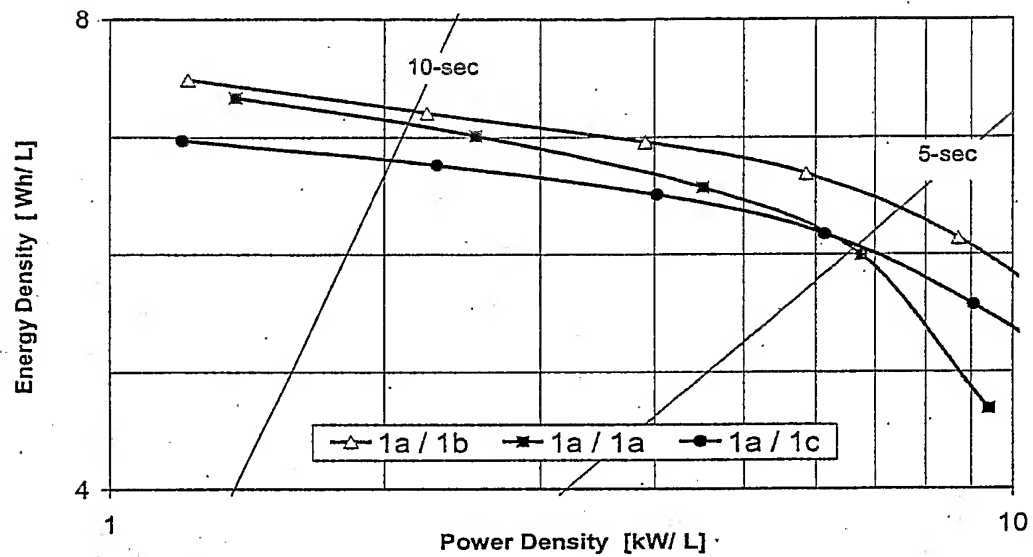

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/04202

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C01B31/00 C01B31/12 C01B31/02 C01B31/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 100 24 312 A (FRAUNHOFER GES FORSCHUNG) 26 July 2001 (2001-07-26) the whole document in particular: col1 lines 35-68 (especially lines 40-41 and 58-61); col3 lines 3-14 and 62-68; col4 lines 59-64; col 5 lines 58- 61; example 2; claims	1-4
X	US 5 614 459 A (MONDRAGON FANOR ET AL) 25 March 1997 (1997-03-25) in particular col 2 lines 21-22 and lines 44, 49 column 2, line 18-30, 40-55 column 3-4 claims 1, 6	1, 4

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

17 March 2004

Date of mailing of the international search report

23/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Arnotte, E

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/04202

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 965 483 A (BAKER FREDERICK S ET AL) 12 October 1999 (1999-10-12) the whole document ---	1-4
A	EP 0 583 174 A (WESTVACO CORP) 16 February 1994 (1994-02-16) the whole document ---	1-4
A	US 3 817 874 A (BUKVICH J ET AL) 18 June 1974 (1974-06-18) the whole document ---	1-4
A	EP 0 896 377 A (MITSUBISHI CHEM CORP) 10 February 1999 (1999-02-10) the whole document -----	1-4

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/04202

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 10024312	A	26-07-2001	DE 10024312 A1 AU 4051501 A WO 0152981 A1 EP 1250189 A1	26-07-2001 31-07-2001 26-07-2001 23-10-2002
US 5614459	A	25-03-1997	NONE	
US 5965483	A	12-10-1999	US 5416056 A AU 670215 B2 AU 7743794 A CA 2134160 A1 DE 69409907 D1 DE 69409907 T2 EP 0649815 A1 HK 1010813 A1 JP 2735491 B2 JP 7232908 A NZ 264766 A TW 382003 B US 5626637 A US 5710092 A	16-05-1995 04-07-1996 15-06-1995 26-04-1995 04-06-1998 21-01-1999 26-04-1995 25-06-1999 02-04-1998 05-09-1995 28-10-1996 11-02-2000 06-05-1997 20-01-1998
EP 0583174	A	16-02-1994	US 5250491 A CA 2092351 A1 DE 583174 T1 EP 0583174 A1 JP 2618583 B2 JP 6056416 A MX 9301916 A1 US 5324703 A US 5538932 A	05-10-1993 12-02-1994 03-11-1994 16-02-1994 11-06-1997 01-03-1994 30-06-1994 28-06-1994 23-07-1996
US 3817874	A	18-06-1974	BE 739056 A CA 931933 A1 CA 922683 A2 DE 1947277 A1 FR 2018356 A5 GB 1287275 A GB 1287276 A JP 48014552 B NL 6913672 A ,B US 3642657 A	02-03-1970 14-08-1973 13-03-1973 16-07-1970 29-05-1970 31-08-1972 31-08-1972 08-05-1973 20-03-1970 15-02-1972
EP 0896377	A	10-02-1999	DE 69805029 D1 DE 69805029 T2 EP 0896377 A1 JP 11111296 A US 6150055 A US 6524748 B1	29-05-2002 07-11-2002 10-02-1999 23-04-1999 21-11-2000 25-02-2003